



# PROVIDING SUPERIOR TRACTOR PROTECTION



**CENEX® TRACTOR HYDRAULIC FLUIDS**





# PREMIUM TRACTOR HYDRAULIC FLUIDS




## *for Excellent Tractor Protection*

**Avoid costly downtime with routine hydraulic system maintenance using Maxtron® THF+, Qwiklift® HTB® and Qwiklift® HTB® Low Vis.**

Changing hydraulic fluids in your equipment is an important maintenance procedure that can't be neglected.

Over time, hydraulic fluids lose their effectiveness as antiwear additives are used up. Moisture and dirt buildup can cause corrosion and wear on gears, hydraulic pumps and other moving parts. Overheating the system can damage seals, allow deposits to form, and cause the fluid to break down.

### **Minimize contamination and overheating by:**

-  Fixing leaks promptly
-  Checking fluid levels regularly
-  Servicing the hydraulic system as recommended

### ***Why should you change your hydraulic oil?***

Changing your hydraulic fluid annually or as recommended by your equipment manufacturer can:

- Reduce the chances of having a hydraulic system failure
- Remove contaminants that may have accumulated during operation
- Increase performance
- Save on repair costs and downtime



Maxtron® THF+, Qwiklift® HTB® and Qwiklift® HTB® Low Vis hydraulic fluids are specifically formulated for equipment that uses a central system for lubricating the transmission, differential, wet brake, power steering and hydraulic systems.

These fluids are designed to provide superior transmission and hydraulic operations at all temperatures, while keeping the internal parts clean and extending seal life. They can be combined with OEM or other tractor hydraulic fluids in leased, shared, or borrowed equipment.





## Qwiklift® HTB® and Qwiklift® HTB® Low Vis are multifunctional universal tractor hydraulic fluids that provide unparalleled wear protection.

Qwiklift® HTB® offers a higher level of protection for hydraulic pumps in agriculture, off-highway, construction and forestry equipment. Made with the finest Group II base oils, additives and formulating techniques, this premium tractor hydraulic fluid (THF) offers critical bronze alloy part protection. Other THFs may not prevent copper corrosion in the pumps, causing loss of critical tolerances, metal fatigue, reduced pump output and hydraulic system failure.


The following parts shown on the right are bronze alloy cylinder sleeves from a Sauer-Danfoss Series 90 axial piston pump. Qwiklift HTB and a leading commercial THF were evaluated\* in these pumps, under identical conditions, to measure their copper protection. The cylinder liner run with Qwiklift HTB shows no corrosion, abrasive wear or fatigue failure. This is the protection you want for your equipment. Qwiklift HTB liners are in virtually new condition, while the OEM fluid's liners show extensive corrosion, wear and breakage. The Qwiklift HTB cylinder liners pictured below show the protection you want for your equipment.

In a head-to-head evaluation against a leading OEM brand THF, Qwiklift HTB provided the excellent copper protection that agriculture, construction, and forestry equipment require. During this pump test, the amount of copper (Cu) that accumulated in the drain oil was measured. High copper levels in the oil indicated excessive wear and/or corrosion.

### Improved Extreme-Pressure and Antiwear Performance

Qwiklift HTB contains superior antiwear additives that provide excellent protection for increased driveline life. Test results show virtually no pitting on critical gear surfaces with Qwiklift HTB. By comparison gears run on competitive fluids show mild to severe pitting. These benefits of Qwiklift HTB translate into:

- Reduced wear and longer equipment life
- Longer life and less maintenance for bearings and transmission parts
- Greater protection of hydraulic pumps, providing consistent operation




Qwiklift® HTB® protects gears from wear, prolonging driveline life




Gears run on competitive fluid shows wear and pitting damage

#### Cylinder liners from these test pumps\*

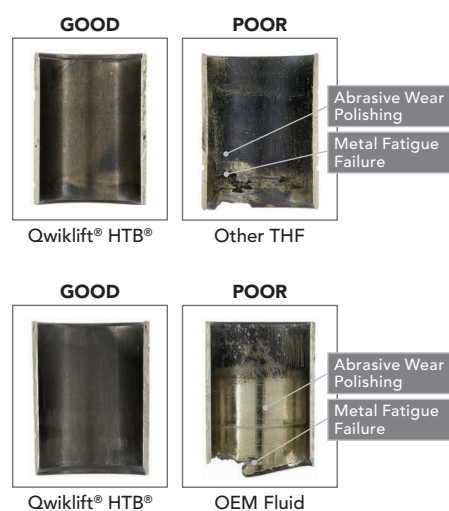

\*Based on independent research facility testing.

#### Head-to-head evaluation of copper accumulation

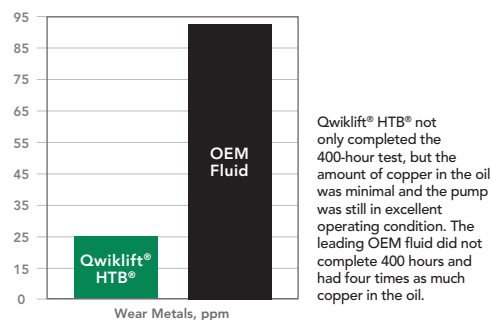



### Qwiklift® HTB® Typical Properties

SAE Viscosity Grade (approx.)	10W-30
API Gravity/Density lbs/gal	29.5/7.32
Flash Point, °C (°F)	220 (428)
Pour Point, °C (°F)	-45 (-49)
Viscosity, cSt @ 100° C	9.5
Viscosity, cSt @ 40° C	61
Viscosity Index	140
Brookfield Viscosity, cP @ -20 °C	4,500
Brookfield Viscosity, cP @ -35 °C	55,000
Foam Test ASTM D892	Pass
DKA Oxidation Test	Pass
Seal Compatibility	Pass
OEM Shear Stability	Pass
API Gear Performance	GL-4
Color	Green

### Qwiklift® HTB® Low Vis Typical Properties

SAE Viscosity Grade (approx.)	5W-20
API Gravity/Density lbs/gal	31.1/7.25
Flash Point, °C (°F)	176 (350)
Pour Point, °C (°F)	-51 (-60)
Viscosity, cSt @ 100° C	7.2
Viscosity, cSt @ 40° C	34
Viscosity Index	183
Brookfield Viscosity, cP @ -20 °C	1,300
Brookfield Viscosity, cP @ -40°C	18,000
Foam Test ASTM D892	Pass
DKA Oxidation Test	Pass
Seal Compatibility	Pass
OEM Shear Stability	Pass
API Gear Performance	GL-4
Color	Blue

**Qwiklift® HTB®** is suitable for use in the following applications:

**AGCO:** Power Fluid 821XL, 821, **Case-IH:** Hy-Tran® Ultra, Hy-Tran® Plus, Hy-Tran®, MAT-3540, MAT-3505, MS-1210, 1209, 1207, 1206, JIC 144/145, Powergard PTF, **Caterpillar:** MTO, **Deutz/Allis:** Power Fluid 821, **Fendt CVT:** 1000 hour drain (shortened interval), **Ford New Holland:** Mastertran Ultraction (MAT-3540), M2C-134A,B,C,D, MAT- 3525, M2C-41B, M2C-53A/B, M2C-86B, **Hesston/Fiat:** Olio fiat Tutela Multi-F, **John Deere:** Hy-Gard; J20C/A, JD 303, J14C/B, **Kubota:** Kubota UDT Fluid, Transdraulic Fluid, **Massey Ferguson:** M-1145, 1143 Permatran III, MF-1127A/B, MF-1129A, **Steiger:** Hydraulic/Transmission Fluid 17001, **Landini:** Tractor II Hyd Fluid, **Versatile:** HyGear Fluid, Specification 23, **White/Oliver/MM:** AG ONE, Universal Fluid, Type 55, Q-1826 HTF, **Zetor:** OT-H, GL-4

**Qwiklift® HTB® Low Vis** is suitable for use in the following applications:

**John Deere:** J20D/B, J21A, **Versatile:** Hy-Gear Fluid, Specification 24M

### BENEFITS of Qwiklift® HTB®

- Twice the gear load carrying capability of leading OEM fluids
- Four times the protection of copper components associated with transmission hydraulic systems
- Stops the advance of copper corrosion present in existing tractor/hydraulic applications

### BENEFITS of Qwiklift® HTB® Low Vis

- Extreme cold temperature startups
- Premium operation in certain hydrostatic drives calling for low viscosity fluid

### Improved Performance

- Smoother operation, especially at low temperatures, providing peak operating efficiency even in cold weather
- Smoother, easier shifting over the life of the equipment, resulting in less wear on transmission parts
- Less sludge buildup, providing peak efficiency and longer equipment life
- Reduced varnish on critical parts
- Reduced maintenance for both parts and fluid, resulting in longer equipment life and reduced downtime







## Maxtron® THF+ is a full synthetic tractor hydraulic fluid, specifically formulated for extreme weather conditions.

Maxtron® THF+ is formulated specifically for tractors which use a centralized system to lubricate the transmission, differential, wet brakes, power steering and hydraulic systems.

The premium synthetic base oils provide excellent cold-flow characteristics while maintaining high temperature viscosity stability. A special additive package is used to provide antiwear and oxidation properties, which enable

heavy differential gear loads and resistance to oxidation stress from high temperatures. Maxtron THF+ is formulated to balance friction and provide a smooth operation, while eliminating brake chatter.

The fluid is designed to provide superior transmission and hydraulic operations at all temperatures with a special emphasis on subzero weather conditions, while keeping the internal parts clean and prolonging the life of sealing materials.

### Maxtron® THF+ Typical Properties

SAE Viscosity Grade (approx.)	5W-30
API Gravity/Density lbs/gal	33.5/7.14
Viscosity, cSt @ 40° C (SSU)	54.5 (253)
Viscosity, cSt @ 100° C (SSU)	10.5 (61)
Viscosity Index	184
Pour Point, °C (°F)	-51 (-60)
Brookfield Viscosity, cP @ -20 °C	2,100
Brookfield Viscosity, cP @ -40 °C	19,000
Foam Test ASTM D892	Pass
DKA Oxidation Test	Pass
Seal Compatibility	Pass
OEM Shear Stability	Pass
API Gear Performance	GL-4
Color	Blue

**Maxtron® THF+** is suitable for use in the following applications:

**AGCO:** Power Fluid 821, 821 XL, **ALLISON:** C-2 (Obsolete), C-3 (Obsolete), and C-4, **Case-IH:** Hy-Tran®, Hy-Tran® Plus, Hy-Tran® Ultra, 1209, 1207, 1206, JIC144/145, Power PRF, **Caterpillar:** MTO, **Deutz/Allis:** Power Fluid 821, **Ford New Holland:** Mastertran Ultraction (MAT-3540), M2C-134A,B,C,D, M2C-41B, M2C-53 A,B,M2C-86B, MAT-3525, **Hesston/** **Fiat:** Ollofiat Tutela Multi-F, **John Deere:** Hy-Gard J20 C/A, JD 303, J14 C/B, **Kubota:** Kubota UDT Fluid, Transdraulic Fluid, **Massey Ferguson:** M-1145, 1143, Permatran III, MF-1127A/B, MF1129A, **Steiger:** Hydraulic/Transmission Fluid 17001, **Versatile:** HyGear Fluid, Specification 23, **White/Oliver/MM:** AG ONE, Universal Fluid, Type 55, Q-1826 HTF

## FEATURES and BENEFITS

### Superior performance in these applications:

- All brands of tractors that have a common sump for transmissions, hydraulics, differentials and wet brakes
- High and low temperature operations
- Wear and oxidation control
- Preventing wet brake chatter

**Pumping Efficiency:** Retains viscosity at high temperatures and minimizes viscosity shear loss which increases hydraulic power output at all operating temperatures.

### Low Temperature Performance:

Excellent fluidity and superb hydraulic system operation at subzero temperatures.

**Chatter Free:** Outstanding frictional properties which reduce annoyance and damage caused by wet brake chatter.

**Wear Protection:** Protects gears, pumps and other parts from wear due to high loads, therefore extending equipment life.

**Compatibility:** Prolongs life of oil seals and hydraulic hoses, reducing downtime.

**System Cleanliness:** Keeps all system parts clean and varnish free for smooth operation.

**Oil Durability:** Superior oxidation control reduces oil degradation from high operating temperatures providing longer oil life.





## A PROTECTION PLAN *Like No Other*

### Protecting your equipment inside and out with the Cenex Total Protection Plan®.

Farmers, you know how important machinery and equipment is to your overall success. That is why many farmers enroll in the Cenex Total Protection Plan®, a warranty program that has you covered when the unexpected happens. The comprehensive plan covers new equipment for up to 10 years or 10,000 hours and used equipment for up to 8 years or 8,000 hours. Extend the life of your equipment with the best warranty program in agriculture – the Cenex Total Protection Plan.

Visit [Cenex.com/TPP](http://Cenex.com/TPP) for more information, or contact your Cenex Lubricants Representative.



“ This program is great for peace of mind. I enrolled my used tractor, submitted the oil samples as required, made one call, and the claim was covered. ”

– Brian Jaeger, Mapleton, Minn.



5500 Cenex Drive, Inver Grove Heights, MN 55077 | 800-852-8186 | [cenex.com](http://cenex.com)